



Date	Name
2021-07-14	DRG

PIN DEFINITION

1	NC
2	NC
3	NC
4	NC
5	GND
6	GND
7	VCI
8	VCI
9	SDO
10	SDA
11	SCL
12	CS
13	REST
14	R7
15	R6
16	R5
17	R4
18	R3
19	R2
20	R1
21	RO
22	G7
23	G6
24	G5
25	G4
26	G3
27	G2
28	G1
29	G0
30	B7
31	B6
32	B5
33	B4
34	B3
35	B2
36	B1
37	B0
38	DE
39	DCLK
40	HS
41	VS
42	NC
43	LEDK
44	NC
45	LEDA

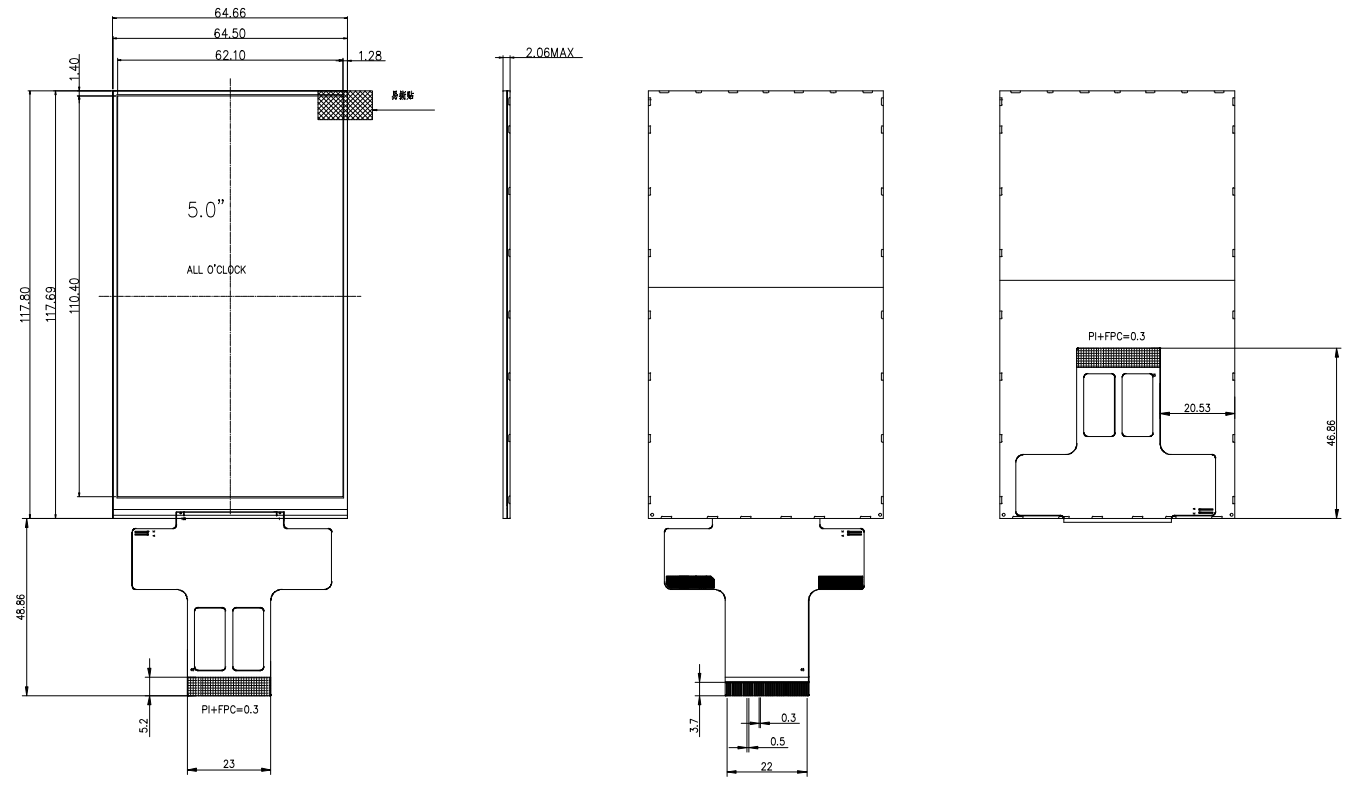

B/L CIRCUIT DIAGRAM

LED; IF =40mA, VF=19.2V

- NOTES:
- 1.DISPLAY TYPE: 5.0"HD TFT
 - 2.VIEWING DIRECTION: ALL O'CLOCK
 - 3.LCD DRIVE IC: ILI9806E
 - 4.POLARIZER MODE: TRANSMISSIVE/POSITIVE
 - 5.OPERATING TEMP: -10°C~+60°C
 - 6.STORAGE TEMP: -20°C~+70°C
 - 7.UNMARKER TOLERANCE: ±0.20
 - 8.REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

深圳市正晶浩电子有限公司					DRG DATE	
					DRAWING	DRG
TITLE.	LCM OUTLINE	REV.	UNIT	SIZE	CHECK	DRG
MODEL.	ZJH5006A-01	1.0	mm	A4	APPROVE	DRG